


Sky Drive Cruise Control Interrupt Option

Wiring:

- **RED** = Battery Power (constant +12V)
- **BLACK** = Good Chassis Ground
- **ORANGE** = Cruise Control Interrupt Signal
 - No voltage when GPS Signal is good.
 - +12V pulse for 2 seconds if GPS Signal is Lost.
- **GREEN** = Speed Signal For Cruise Control
- **WHITE** = Speed Signal For Speedometer

Example Application:

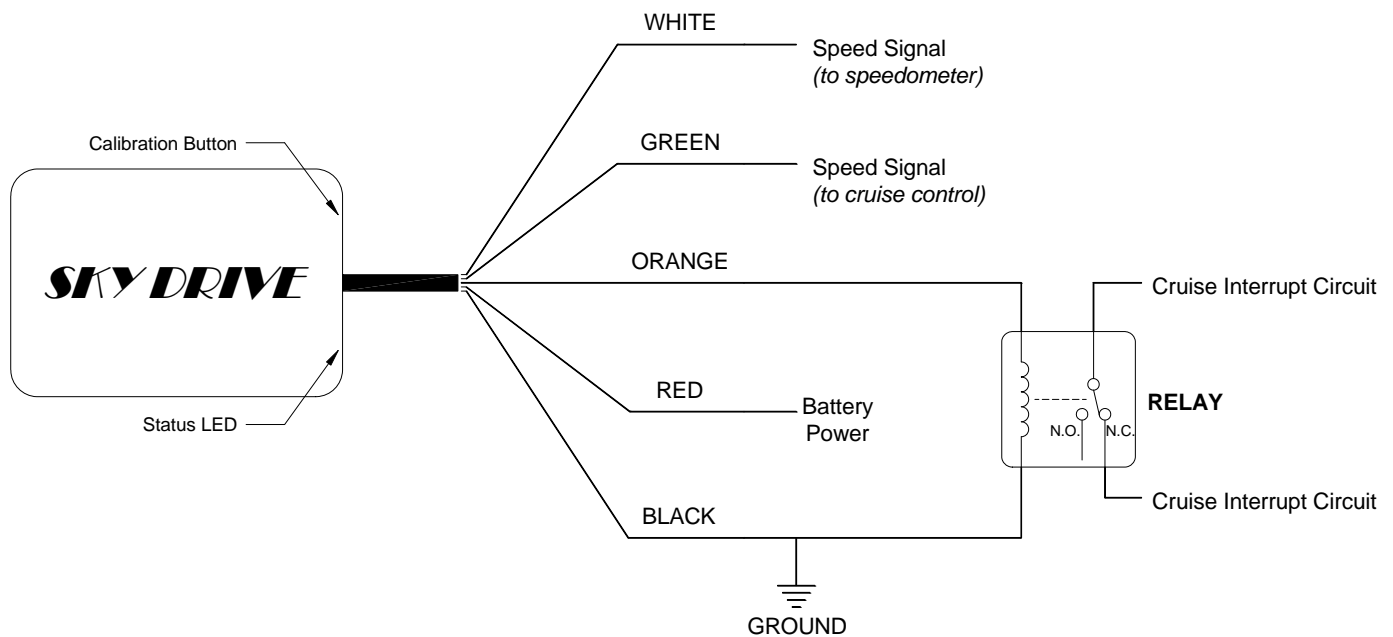

As a safety feature, the Sky Drive is designed to turn off the vehicle's cruise control in the event of a lost GPS signal. A two-second, 12-volt pulse is provided on the orange wire to drive a relay coil, which must be wired into the vehicle's cruise control interrupt circuit.