


2-1/8" Full Sweep Coolant & Transmission Temperature

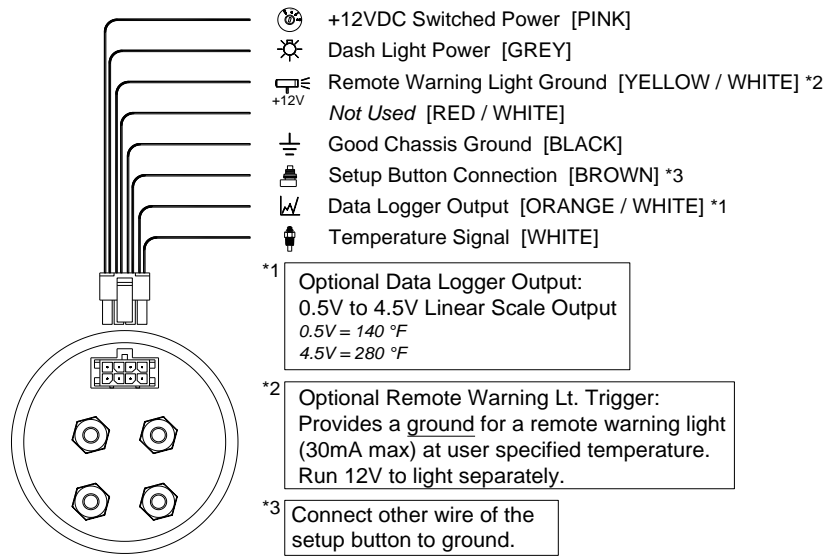

To Set Backlight Color (cool white / warm white):

1. Start with power off.
2. Press and hold pushbutton.
3. While pressing pushbutton, apply power to the gauge (starting vehicle not necessary).
4. Release pushbutton once power is applied.
5. The pointer will indicate 210 °F.
6. Tap the pushbutton to move the pointer to 140 °F.
7. With the pointer indicating 140 °F, press and hold the pushbutton until the pointer moves to 175 °F or 245 °F.
8. 175 °F represents the “cool white” lighting option and 245 °F represents the “warm white” lighting option. Tap the pushbutton to move the pointer between 175 °F and 245 °F.
9. When the pointer is indicating the desired lighting option, press and hold the pushbutton until the pointer returns to 140 °F. Turn off power to save the changes.

To Set Warning Light Trigger Point:

1. Start with power off.
2. Press and hold pushbutton.
3. While pressing pushbutton, apply power to the gauge (starting vehicle not necessary).
4. Release pushbutton once power is applied.
5. The pointer will indicate 210 °F.
6. Tap the pushbutton twice to move the pointer to 140 °F and back to 210 °F again.
7. Press and hold the pushbutton (with the pointer at 210 °F) until the pointer moves to indicate the warning light trigger point.
8. Press and hold the pushbutton to change the trigger temperature shown. The first time the pushbutton is pressed and held, the temperature shown will increase. The second time the pushbutton is pressed and held, the temperature shown will decrease. The temperature shown will alternate between increasing and decreasing each time the pushbutton is pressed.
9. If the set trigger temperature is below 210 °F, the warning light will come on when the temperature is below the trigger temperature. If the set trigger temperature is above 210 °F, the warning light will come on when the temperature is above the trigger temperature.
10. Once the desired trigger point is shown, wait 10 seconds without pushing the pushbutton in order to save the setting. The pointer will return to 140 °F. Turn off power to save the changes.

Important: Turn power OFF to the gauge after making changes in order to save those changes